

# RIP6100N

## REMOTE DISPLAY


LAUMAS®



### DESCRIPTION

- Remote display with big digits display, suitable for wall mounting.
- 6-digit semi-alphanumeric red SMD LED display (90 mm height).
- 4 signalling LED.
- Aluminum profile box.
- IP30 protection rating.
- Serial ports for transmission protocol.
- Configuration from PC via RS232 serial port.
- 15 settable addresses.
- Power supply included: 12 VDC/2 A - 100÷240 VAC input cable length: 1.2 m.
- Serial connection cable (length: 5 m) and brackets for wall mounting included.

### DIEMENSIONS

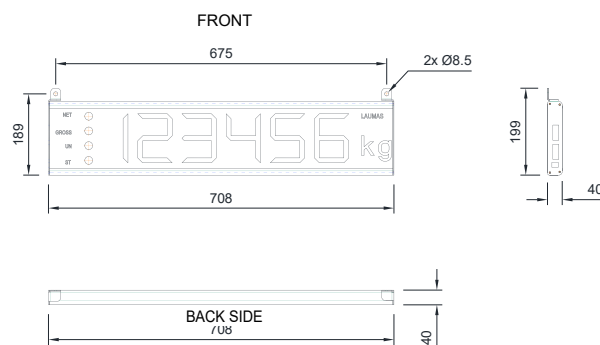

### TECHNICAL FEATURES

Power supply	12 VDC; 1.5 A
Serial port	RS232, RS485
Baud rate	9600 (bit/s)
Humidity (condensate free)	80%
Storage temperature	-10 °C +60 °C
Working temperature	-10 °C +50 °C

### CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom

# Remote displays

## PRODUCTS OVERVIEW

LAUMAS®



CODE	RIP6100IP65	RIP6100N	HDRIP675Y
Power supply and consumption	110÷240 VAC; <10 VA	12 VDC; 1.5 A	230 VAC; 25 VA
Serial ports	RS232/RS485	RS232/RS485	RS232
Dimensions	745x160x50 mm	708x199x40 mm	540x178x54 mm
Baud rate	9600 (bit/s)	9600 (bit/s)	9600 (bit/s)
Humidity (condensate free)	85%	80%	85%
Storage temperature	-20 °C +60 °C	-10 °C +60 °C	-10 °C +50 °C
Working temperature	-10 °C +50 °C	-10 °C +50 °C	0 °C +40 °C
Protection rating	IP65	IP30	IP40



CODE	RIPLD5100	RIP550SHA	RIPDOSMANHA
Power supply and consumption	12÷24 VDC; 20 W	12÷24 VDC; 10 W	12÷24 VDC; 30 W
Serial ports	RS232/RS422	RS232/RS422	RS232/RS422
Dimensions	468x390x130 mm	310x230x130 mm	468x390x130 mm
Baud rate	1200, 2400, 4800, 9600, 19200, 38400, 57600 (bit/s)	1200, 2400, 4800, 9600, 19200, 38400, 57600 (bit/s)	1200, 2400, 4800, 9600, 19200, 38400, 57600 (bit/s)
Humidity (condensate free)	85%	85%	85%
Storage temperature	-20 °C ÷ +50 °C	-20 °C +50 °C	-20 °C ÷ +50 °C
Working temperature	-10 °C ÷ +40 °C	-10 °C +40 °C	-10 °C ÷ +40 °C
Protection rating	IP56	IP56	IP56