



CAPACITY	kg	DIVISION (g)	NET WEIGHT (kg)	CODE
6		e=0.2	2.8	LACSN6
15		e=0.5	2.8	LACSN15
30		e=1	2.8	LACSN30

DESCRIPTION

- Stainless steel plate.
- 6-digit backlit LCD display (30 mm height).
- 8-key waterproof keyboard.
- Bubble level and adjustable feet.
- 4 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- External battery charger 230 VAC included.

MAIN FUNCTIONS

- Weight indication.
- Piece counting.
- Weight indication as a percentage.
- RS232 output for connection to PC.
- Weight checking (HIGH/LOW) with acoustic alarm.

CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST


CODE



Linearity test

TARATURA50

DIMENSIONS (mm)

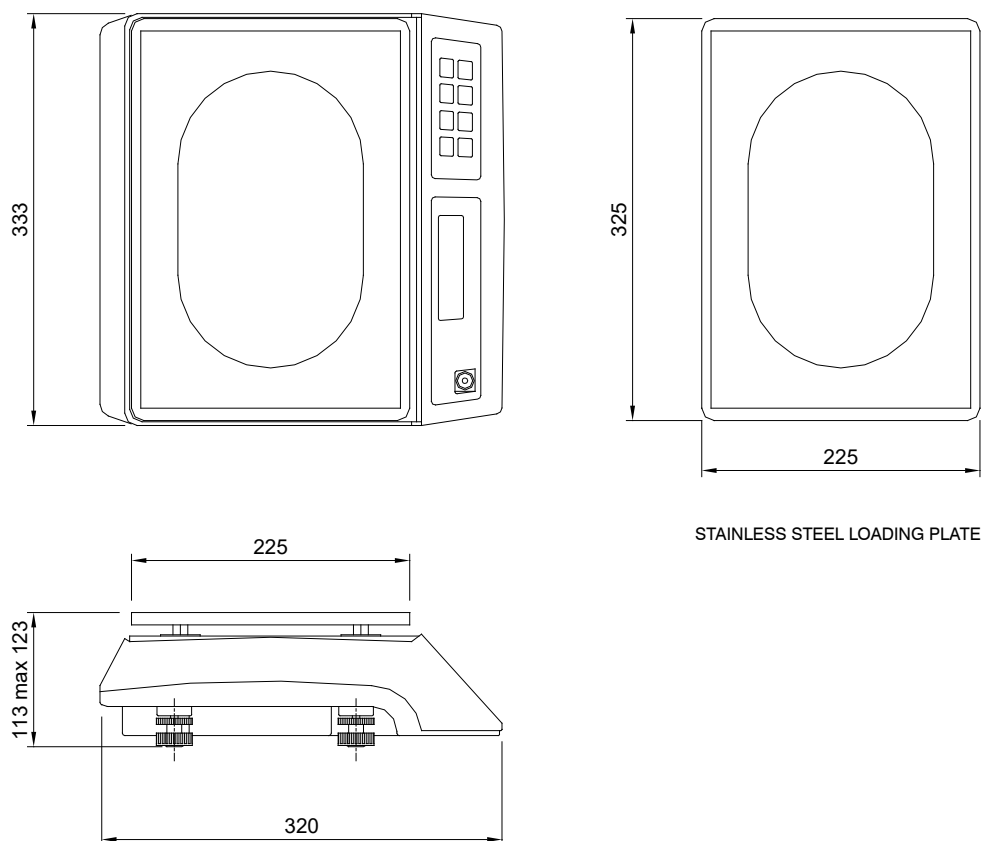

STAINLESS STEEL LOADING PLATE

TECHNICAL FEATURES

Power supply	230 VAC $\pm 10\%$
Internal battery	4 V, 4 Ah capacity
Linearity	$< 0.01\%$ full scale
Display resolution	30000
Units of measure	kg, lb
Serial port	RS232
Baud rate	1200, 2400, 4800, 9600 (bit/s)
Humidity (condensate free)	$< 85\%$
Storage temperature	$-10\text{ }^{\circ}\text{C}$ $+50\text{ }^{\circ}\text{C}$
Working temperature	$0\text{ }^{\circ}\text{C}$ $+40\text{ }^{\circ}\text{C}$