

ADPEW100RIP

W100RIP REMOTE DISPLAY IN EXPLOSION PROOF BOX

LAUMAS®




DESCRIPTION

- W100RIP remote display.
- ADPE explosion proof box equipped with heat-resistant transparent tempered glass window:

ATEX marking	IECEX marking
II 2 GD Ex d IIC T6 Gb Ex tb IIIC T85°C Db IP66 (-20 °C ≤ Ta ≤ +40 °C) BVI 14 ATEX 0007	Ex d IIC T6 Gb Ex tb IIIC T85°C Db IP66 (-20 °C ≤ Ta ≤ +40 °C) IECEX EPS 14.0017

- The instrument can be configured and managed using the free "Instrument Manager" PC software, which you can download from www.laumas.com.

DIMENSIONS (mm)

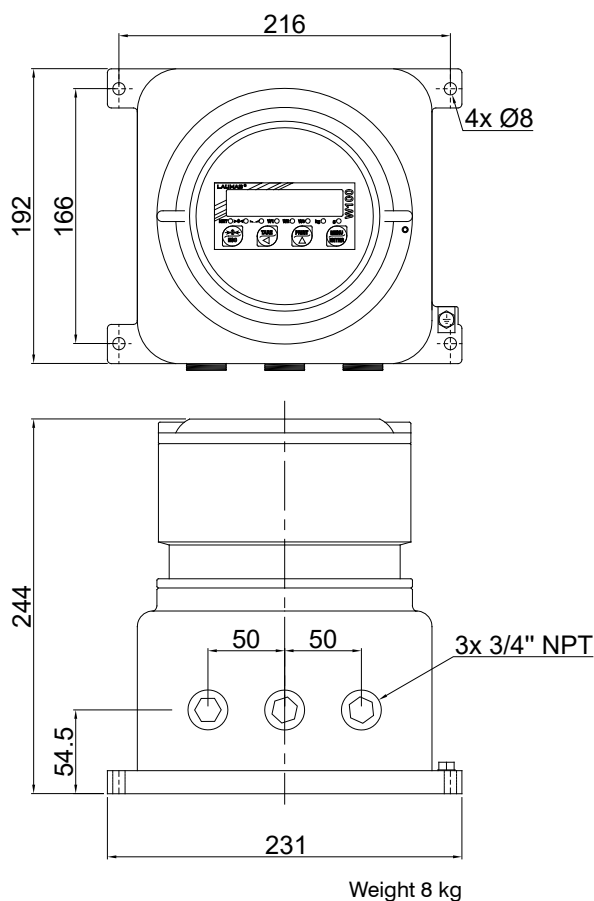

ADPEW100RIP

W100RIP REMOTE DISPLAY IN EXPLOSION PROOF BOX

LAUMAS®

CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom

TECHNICAL FEATURES

Power supply and consumption	12÷24 VDC ±10%; 5 W
Display range	±999999
Decimals • Display increments	0÷4
Relay outputs	5 - max 115 VAC/150 mA
Serial ports	RS485, RS232
Baud rate	2400, 4800, 9600, 19200, 38400, 115200 (bit/s)
Humidity (condensate free)	85%
Storage temperature	-30 °C +80 °C
Working temperature	-20 °C +60 °C

TREATMENT



Treatment for metallic surfaces by "off-shore" painting for ADPEW100 box.