



CAPACITY	kg	DIVISION (g)	NET WEIGHT (kg)	CODE
6		e=0.2	2.8	LACSN6
15		e=0.5	2.8	LACSN15
30		e=1	2.8	LACSN30

### DESCRIPTION

- Stainless steel plate.
- 6-digit backlit LCD display (30 mm height).
- 8-key waterproof keyboard.
- Bubble level and adjustable feet.
- 4 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- External battery charger 230 VAC included.

### MAIN FUNCTIONS

- Weight indication.
- Piece counting.
- Weight indication as a percentage.
- RS232 output for connection to PC.
- Weight checking (HIGH/LOW) with acoustic alarm.

### CERTIFICATIONS




Equivalent of the CE marking for the United Kingdom

#### CERTIFICATIONS ON REQUEST

Calibration report

### DIMENSIONS (mm)

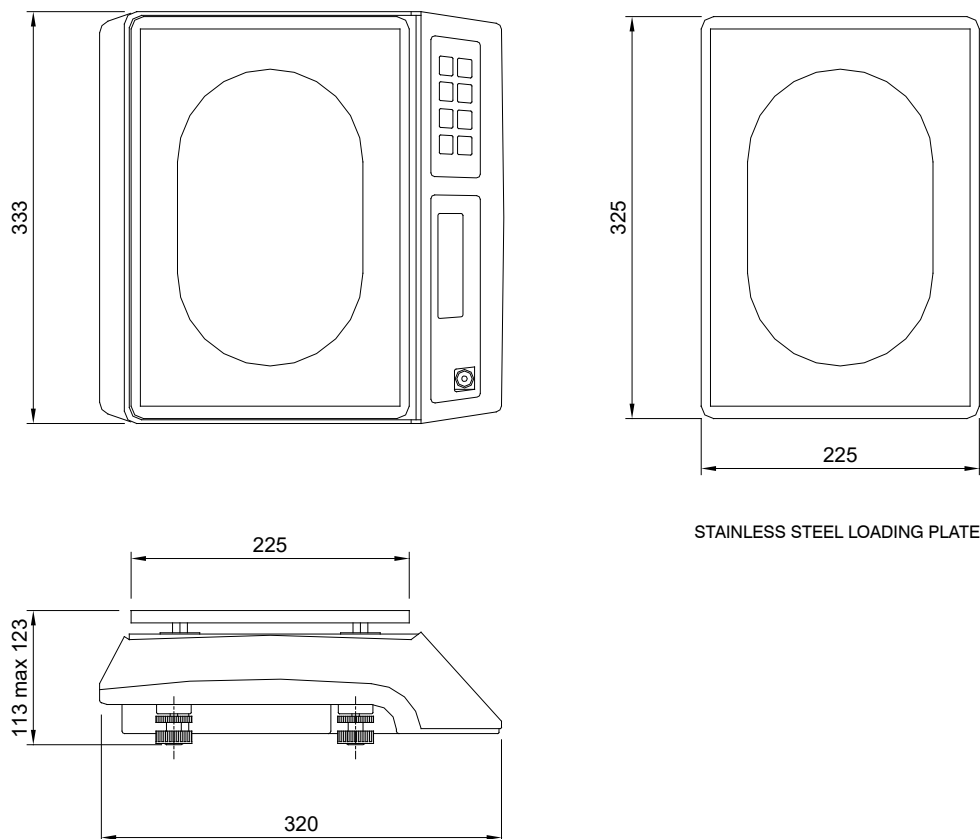

### TECHNICAL FEATURES

Power supply	230 VAC $\pm 10\%$
Internal battery	4 V, 4 Ah capacity
Linearity	$< 0.01\%$ full scale
Display resolution	30000
Units of measure	kg, lb
Serial port	RS232
Baud rate	1200, 2400, 4800, 9600 (bit/s)
Humidity (condensate free)	$< 85\%$
Storage temperature	$-10\text{ }^{\circ}\text{C}$ $+50\text{ }^{\circ}\text{C}$
Working temperature	$0\text{ }^{\circ}\text{C}$ $+40\text{ }^{\circ}\text{C}$